

XENON-S

DUAL SCREEN

For two 40 to 55-inch screens



VIDEOCONFERENCING


Number of screen : 2 screens

Screen size : 40 to 55"


Installation : floor stand

Finish : brushed stainless steel

Part numbers :
XENONSD4050VCPACK
XENONSD5255VCPACK

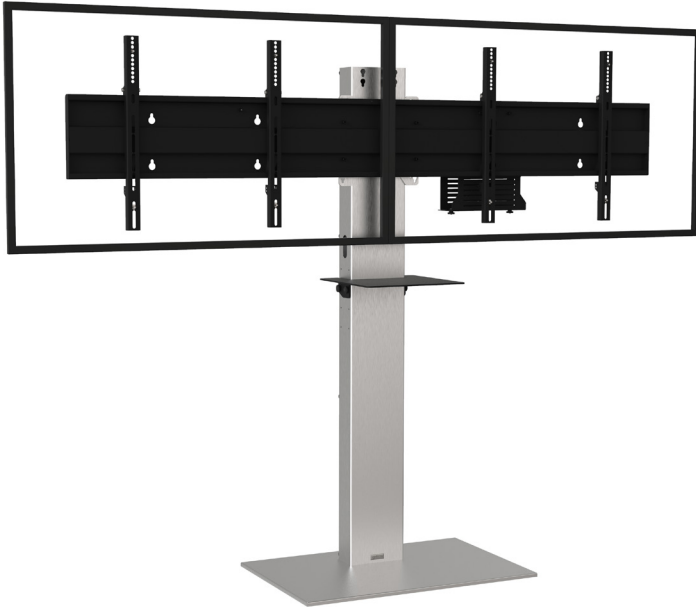

Screens simulation 46"

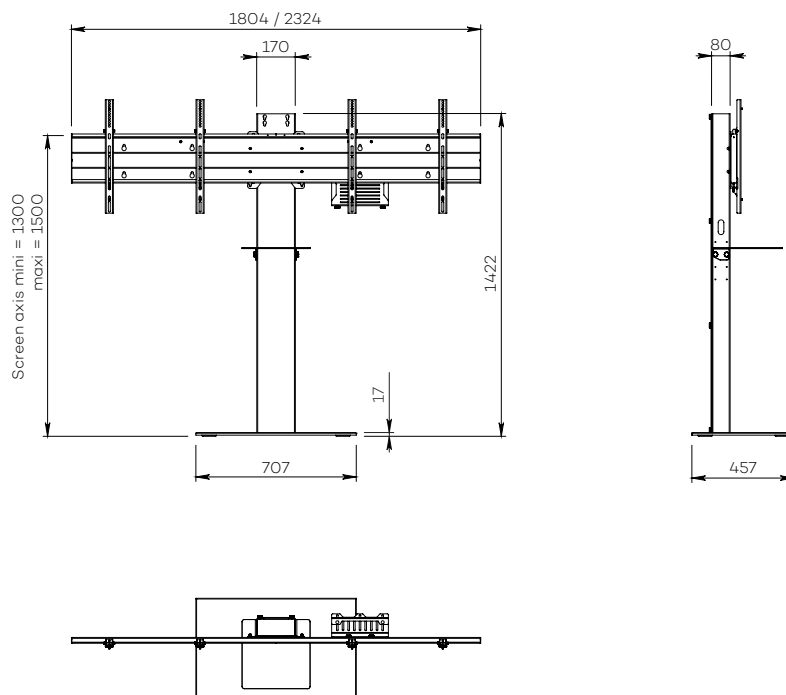

XENON-S DUAL SCREEN

• SPECIFICATIONS

Screen size	For two 40 to 50" screens	For two 52 to 55" screens
Part numbers	XENONSD4050VCPACK	XENONSD5255VCPACK
Base	Steel with brushed stainless steel casing	
Base thickness	10 mm	
Casters / Teflon pads	On Teflon pads	
Base dimensions (w x d x h)	707 x 457 x 17 mm	
Column	Brushed stainless steel	
Column back cover	Back in black ecofriendly acrylic glass	
Column dimensions (w x d x h)	170 x 80 x 1405 mm	
Screen fixing	Black painted steel with fixing kit	
Screen fixing size (VESA)	200 x 200 mm to 800 x 400 mm VESA	
Screen axis with adjustable height	1300 mm to 1500 mm	
Maximum screen weight	30 kg/screen	
Camera shelf with adjustable height	720 mm to 885 mm 4 positions with 55 mm increments	
Stand weight	70 kg	
Accessories included (VC PACK)	<ul style="list-style-type: none"> • Camera shelf (AX0011) Dimensions (w x d) : 300 mm x 230 mm • Universal codec holder (SCUV12) Depth from 10 mm to 95 mm 	

• OPTIONS

Large shelf Dimensions (w x d) : 450 mm x 300 mm	P/N: AX0012
Brushed stainless steel & white finish Column and base in brushed stainless steel Back and camera shelf in white	P/N: /WHITE
Base on casters ø 35 mm	P/N: Wheels
Casters and skirt to cover up ø 35 mm	P/N: Skirtwheels/Xenon-S
Universal camera holder Above the screen	P/N: SCUV3
SCUV3 option Adaptor to fix the SCUV3 between two screens	P/N: SCUV3_2
Assembly before shipment	P/N: SERV_STD_1